

ROAD BARRIERS

for passages from 2 m to 4 m
with unlock device



Easy to use external
unlock device



Stainless steel version
available



New control panel with all the
standard features and pull-out
terminals



LEGEND ON PAGE 11

LADY



- Electromechanical barrier for passages up to 4m, intensive use
- Easy to use external manual unlock device
- Slowing down setup thanks to two adjustable limit switches
- Speed, strength and soft stop/start adjustable for an always correct use and performance
- Possibility of integrated FTC.S photocells thanks to the innovative hide-away system that enables them to be perfectly integrated with the look, ensuring maximum functionality


**Equipped with
foundation plate**



TECHNICAL DATA


	LADY	LADY.I
Power supply	230 Vac	230 Vac
Motor supply	24 Vdc	24 Vdc
Max. Absorbed current	1,6 A	1,6 A
Torque	205 Nm	205 Nm
Opening speed	3"-5"	3"-5"
Operation cycle	intensive use	intensive use
Protection level	IP 44	IP 44
Operating Temp.	-20°C/+50°C	-20°C/+50°C
Weight	52 Kg	52 Kg
Items no. per pallet	9	9

LADY.A



4,2 m aluminium arm with caps included (4200x60x38mm) Available in two pieces needs the joint (LADY.GT)

LADY.P



4, 2 m white painted aluminium arm. Caps are included. Provided with red rubber profiles. Available in two pieces needs the joint (LADY.GT)

VE.TERM




Thermostat for LADY for very cold places

VE.AM



Mobile support

VE.RAST



Aluminium rack L=2 m H=60cm

**VE.AF
VE.AFI**



VE.AF: Painted fixed support
VE.AFI: Stainless steel fixed support for bars

LADY.GT



Aluminium joint for LADY.A

LADY.COL




Support for the installation of a second pair of photocell

LADY.SN



Set of joints for articulation of LADY.A

LADY.L



Flashing light set for LADY-P

VE.CAT500



Set of 20 adhesive refractor strips for LADY/I

**VE.KM1HN
VE.KM2HN**



Single/two-channel loop detector

VE.CS



Traffic-light control unit

VE.TL



230 Vac Traffic-light

CBY.24V



Battery charger card. The CBY.24V card allows to charge two different types of nickel metalidrate and lead batteries.

**DA.BT6
DA.BT2**




DA.BT6: 7Ah 12 VDC Battery
DA.BT2: 2.1Ah 12 VDC Battery
DA.BT6 need must be fitted into an external box


DA.2S



Electronic module which allows the synchronized movement of two gates/barriers




VE.PS

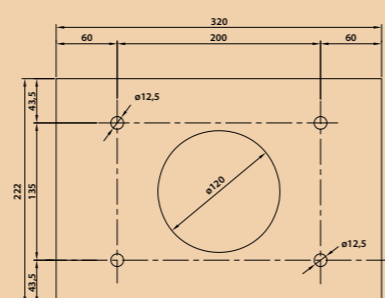

ACCESSORIES FOR USE

	2,2m	2,7m	3,2m	3,7m	4,2m
LADY.A	C	C	C	B	A
LADY.P	C	C	B	B	A
VE.RAST	C	B	B	A	-
LADY.P+VE.RAST	C	B	B	A	-
LADY.P+VE.AM	C	B	B	A	-
LADY.P+VE.RAST+VE.AM	C	B	A	-	-
SC.RES	C	B	B	A	-
LADY.P+SC.RES	C	B	A	A	-
SC.RES+VE.AM	C	B	A	A	-
LADY.P+SC.RES+VE.AM	C	B	A	-	-



LADY.P Protection profiles. The installation of the VE.RAST interferes with the use of the SC.RES and vice versa. The installation of the LADY.L lights kit does not influence the balancing of the bar